

122

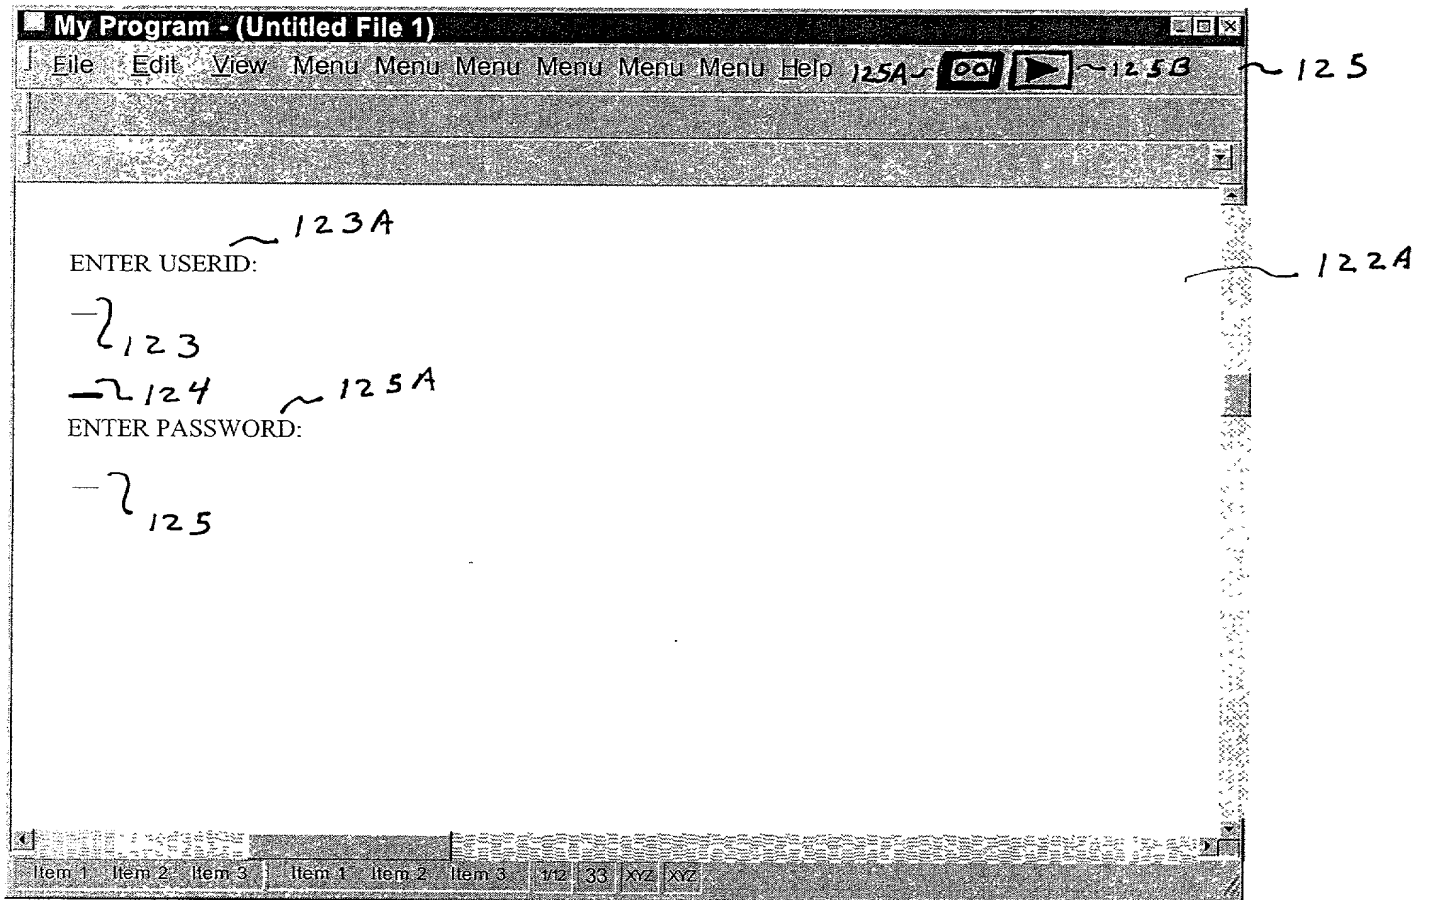


FIG. 2A
(Prior Art)

FIG. 2B is a schematic diagram of a user interface form. It consists of a rectangular frame containing the following elements from top to bottom:

- A rectangular box labeled "TEXT".
- A dashed rectangular box containing two radio button options: "YES" (with a filled circle) and "NO" (with an empty circle). This dashed box is labeled with handwritten reference numerals 134C and 134A.
- A rounded rectangular button labeled "NEXT", which is labeled with handwritten reference numeral 134D.

FIG. 2B

FIG. 2C is a schematic diagram of a user interface form. It consists of a rectangular frame containing the following elements from top to bottom:

- A rectangular box labeled "TEXT", labeled with handwritten reference numeral 138A.
- A dashed rectangular box containing two input fields: "Row" and "Column". This dashed box is labeled with handwritten reference numeral 138B.
- A rectangular box labeled "Current", labeled with handwritten reference numeral 138C.
- A rectangular box labeled "user ID", labeled with handwritten reference numerals 138E and 138D.
- A rounded rectangular button labeled "NEXT".


FIG. 2C

Monitor data fields displayed by an emulator accessing an application.

Detect a first display field with
a specified characteristic.
(password display field)

Determine a second display field with a predefined relationship to the first display field with the specified characteristic.
(user identification display field)

FIG. 3

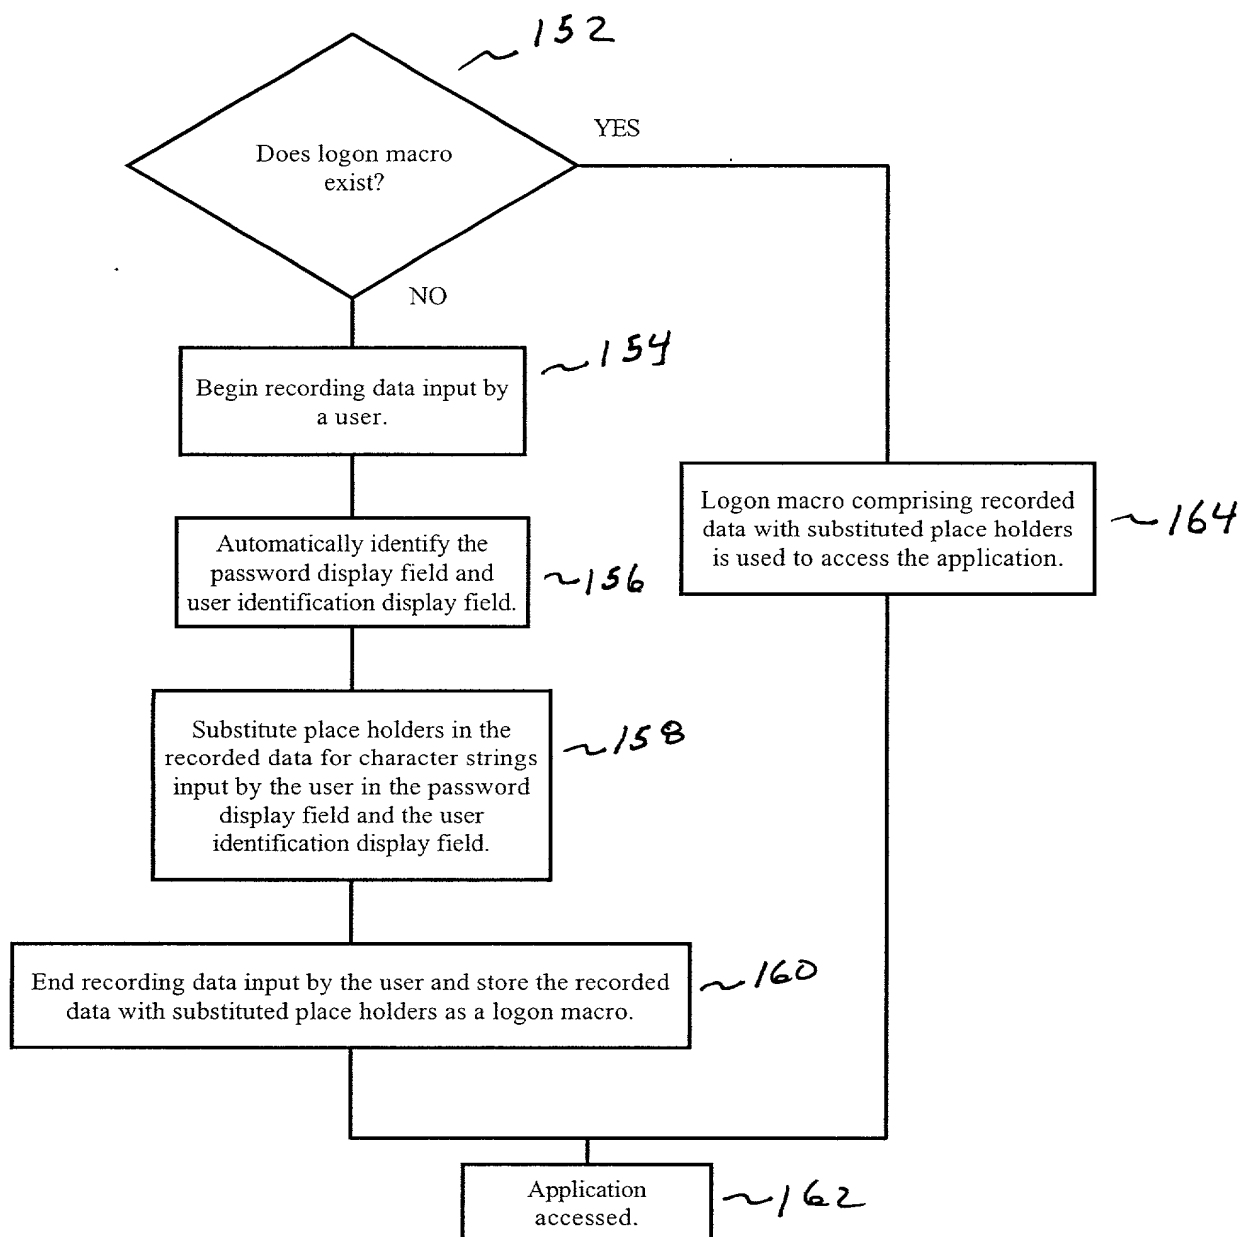[illegible]

F16.4